





Card Dispenser

GENERAL SPECIFICATIONS

- Credit Card Size PVC Cards: 8.5cm x 5.4cm
- Card Issuing Time < 1sec
- Card Reading Time < 1sec
- ISO/IEC 14443A Cards
- Cartridge with 300, 600 and 1000 Cards Capacity
- Card Level Control And Low Card Level Indicator To Host Management System
- Real-time synchronization with the host computer and sending the status online or standalone working with the embedded real time clock unit
- Microcontroller based controller unit supports RS232, RS422 and TCP/IP communication
- With license plate recognition system integration, ability to print license plate on ticket
- Integrated access card reader
~Option 1: 125KHz ~Option 2: 13,56MHz
- Integrated loop detector
- User friendly graphic LCD
- Working temperature: -20°C ~ +70°C
- Automatic temperature and humidity control with integrated thermostat-hygrostat controlled heater
- Zinc phosphate 3 mm sheet steel/aluminium housing with RAL1028 or RAL9006 powder coating against rust perforation
- Power Supply: 100/120, 220/240VAC 50/60Hz
- Power consumption: ~ 0.6kW (with heater)
- Weight: ~45kg Dimensions: (See Below)

Technical Dimensions

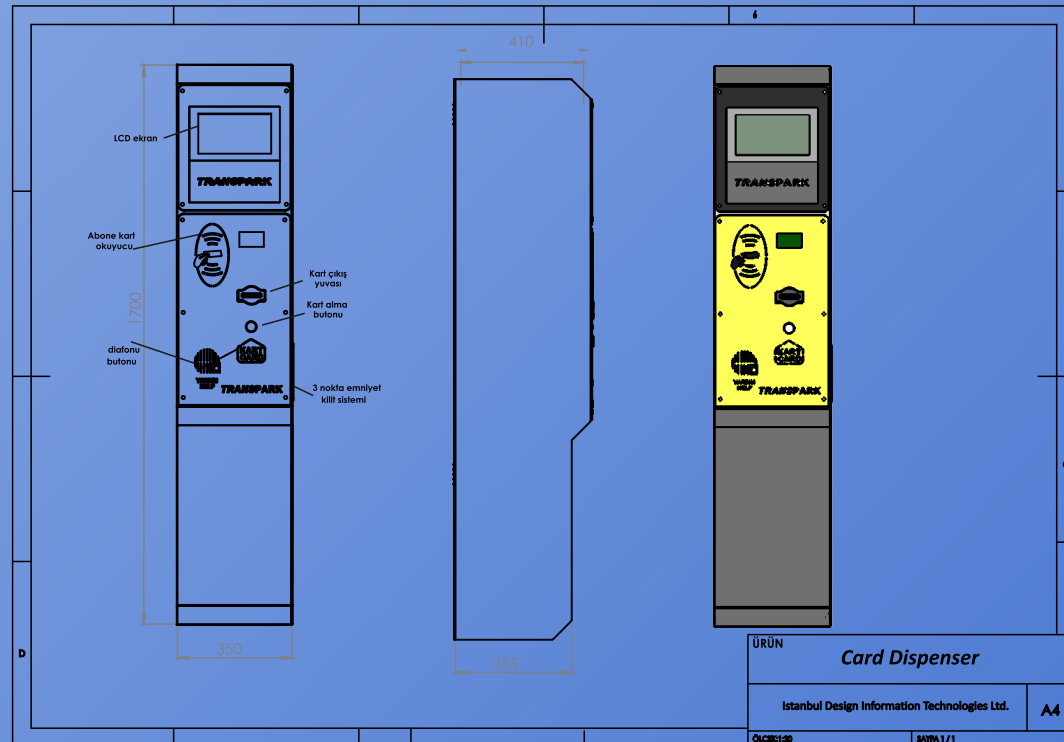

"TRANSPARK" is a registered trademark of İstanbul Design Information Technologies Ltd.





TPKVM - Kart Verme Makinası

GENEL ÖZELLİKLER

- **Reklam/Bilgilendirme amaçlı 7" LCD ekran**
- Sadece önünde araç varken aktif hale geçme,
- Kredi kartı boyutlarında (54±0.5mm, 85±0.5mm) kart kullanımı,
- **Kart Kalınlığı: 0.2mm ~ 1.2mm , Kart Okuma Hızı < 1,5sn**
- **Kart Stoklama Kapasitesi: 1.000-2.000 adet,**
- Bağlı olduğu bilgisayarla online/offline çalışma ve her türlü durum bilgisini anında iletme,
- Sistemle gerçek zamanlı saat bilgisi senkronizasyonu,
- Paslanmaz, korozyona ve dış hava koşullarına, vb. dış etkilere dayanıklı galvaniz kaplı gövde,
- RAL#9006 / RAL#1028 gövde rengi,
- Kullanım kolaylığı sağlayan yönlendirici grafik LCD ekran,
- Abonelik sistemi için entegre akıllı kart okuyucu,
- Entegre tek kanallı manyetik araç (Loop) dedektörü,
- Sistem içinde RS232, RS422 ve TCP/IP haberleşme protokolleri desteği,
- -10 ~ 60°C çalışma sıcaklığı,
- Termostat ve higrostat kontrollü 400W fanlı ısıtıcı ile kabin içi otomatik ısı ve nem kontrolü,
- 100/120, 220/240 220VAC 50/60Hz ± %10 çalışma gerilimi,
- Ağırlık ~45kg / Kolay montaj ve kurulum.

Ürünlerimizde uzakdoğu menşeli mekanik ürün kullanılmamaktadır.

Teknik Ölçüler

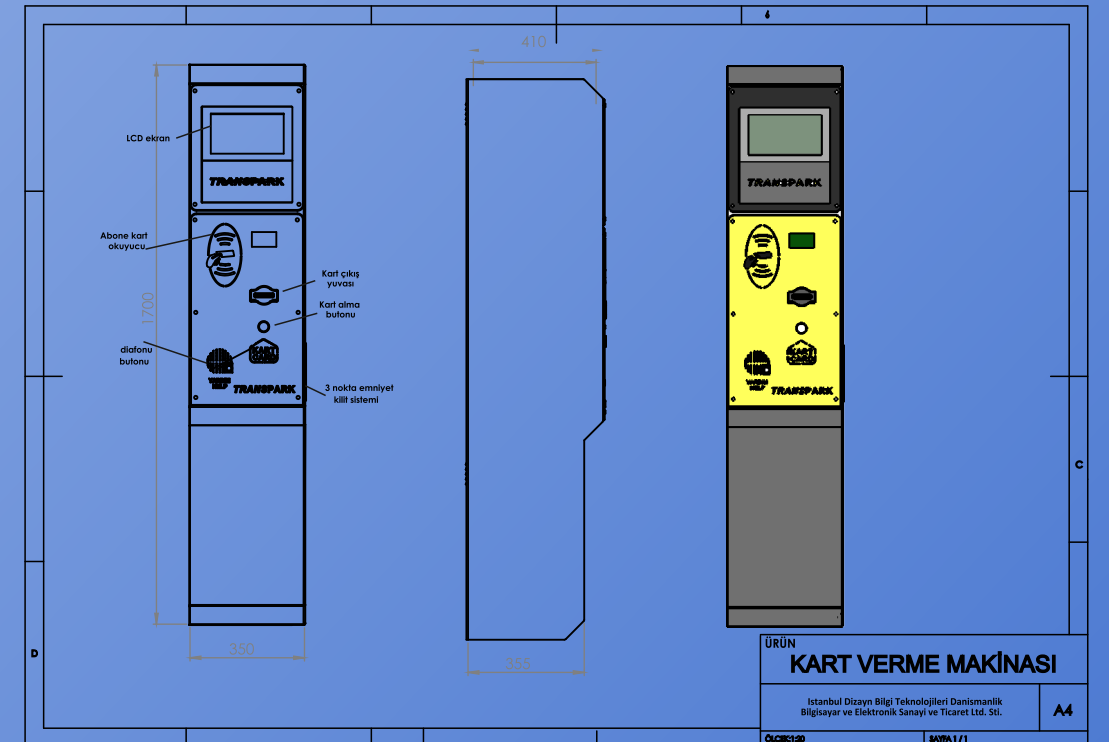

"TRANSPARK"; İstanbul Dizayn Bilgi Teknolojileri Danışmanlık Bilgisayar ve Elektronik Sanayi ve Tic.Ltd.Şti. nin tescilli markasıdır.